




LONG-TERM PROTECTIVE FLOOR COATING FOR CONCRETE AND ASPHALT SUBSTRATES








Qualifloor®



- ✓ Fast-Curing Primerless Product
- Easy Cleaning—One Single, High Gloss Coating
- Excellent UV Resistance—Stays The Same Color, No Loss of Physical Properties
- Options Available: Clear/Pigmentened, Can Be Used Alone or With Flake/Paint Chips or Colored Sand
- ✓ Meets All National Regulations for VOC–Low VOC (12 g/L)
- ✓ Low Odor and Shortened Downtime
- ✓ High Abrasion Resistance (CM 17, 1000 cycles),
 Taber Abrasion of 16.2—Longevity
- ✓ Chemical Resistant —Acetone, Methenol, Standard Chemicals
- ✓ Elongation of 5%, High Tensile Strength 48 N/mm2—More Force to Rip, Will Not Break

Test Method	Test	Result
ASTM D412	Elongation	5%
ASTM D 412	Tensile Strength	8,000 psi
ASTM D2240	Hardness	70 D Scale
ASTM D4060	Abrasion Resistance (CM 17)	16.2 mg loss

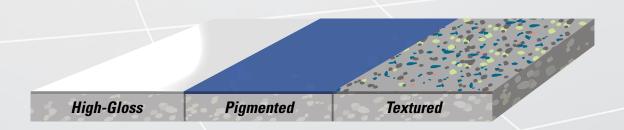



APT AMERICAS

World Headquarters 109 Conica Lane, PO Box 160 Harmony, PA 16037 USA Tel. (724) 452-1330 Fax. (724) 452-1703

APT LATIN AMERICA

6810 North State Rd 7 Coconut Creek, FL 33073 Tel. (561) 716-7742

Tel. (561) 716-7742 (561) 716-7743 Fax. (724) 452-1703

APT ASIA PACIFIC

Factory 3 Dunlopillo Drive Dandenong Victoria 3175 Australia

Tel. +61 3 8792 8000 Fax. +61 3 8792 8001